

Spec Sheet

**DINA**<sup>®</sup>

**DINA RUNNER**



Number **One** in Profitability



**DINA RUNNER**

[www.dina.com.mx](http://www.dina.com.mx)





DINA Camiones, S.A. de C.V.  
Corredor Industrial S/N, Tepeapulco, Cd. Sahagún Hgo., 43990 México  
Lada sin Costo: 01 800 001 3462 [ventas@dina.com.mx](mailto:ventas@dina.com.mx)





**RENDIMIENTO SIN COMPETENCIA**

### DINA RUNNER 8

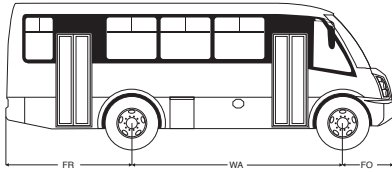



L	LENGTH	336.30 in.	8,542 mm.
W	WIDTH (WITHOUT MIRRORS)	99.40 in.	2,525 mm.
H	HEIGHT	128.70 in.	3,270 mm.
WA	WHEELBASE FRONT AXLE – DRIVE AXLE	174.00 in.	4,420 mm.
FO	FRONT OVERHANG	40.65 in.	1,033 mm.
FR	REAR OVERHANG	121.65 in.	3,090 mm.
AA	ANGLE OF APPROACH		21 degrees
GVW	GROSS VEHICULAR WEIGHT	30,000 lb.	13,608 kg.

### DINA RUNNER 9

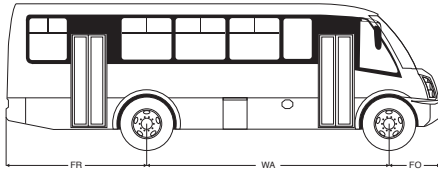

L	LENGTH	368.30 in.	9,355 mm.
W	WIDTH (WITHOUT MIRRORS)	99.40 in.	2,525 mm.
H	HEIGHT	128.70 in.	3,270 mm.
WA	WHEELBASE FRONT AXLE – DRIVE AXLE	206.00 in.	5,232 mm.
FO	FRONT OVERHANG	40.65 in.	1,033 mm.
FR	REAR OVERHANG	121.65 in.	3,090 mm.
AA	ANGLE OF APPROACH		21 degrees
GVW	GROSS VEHICULAR WEIGHT	30,000 lb.	13,608 kg.

### DINA RUNNER 10

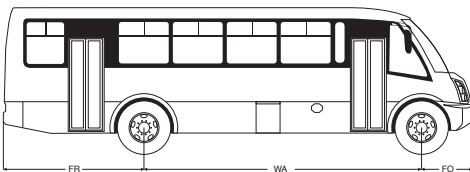

L	LENGTH	398.30 in.	10,117 mm.
W	WIDTH (WITHOUT MIRRORS)	99.40 in.	2,525 mm.
H	HEIGHT	128.70 in.	3,270 mm.
WA	WHEELBASE FRONT AXLE – DRIVE AXLE	236.00 in.	5,994 mm.
FO	FRONT OVERHANG	40.65 in.	1,033 mm.
FR	REAR OVERHANG	121.65 in.	3,090 mm.
AA	ANGLE OF APPROACH		21 degrees
GVW	GROSS VEHICULAR WEIGHT	32,000 lb.	14,515 kg.

## CHASSIS

ENGINE	Cummins ISB. 6.7 L EPA 04. 200 HP @ 2,300 rpm.
TORQUE	520 lb-ft@ 1,600 rpm.
TRANSMISSION	Manual Spicer ES56 – 5A, 5 gears (dual axle). Option: 7 direct gears.
FRONT AXLE	DANA E - 1002 I. 10,000 lb. (12,000 lb: WB 236")
REAR AXLE	DANA 22065 T . 22,000 lb.
FRONT SUSPENSION	10,000 lb. multi leaves. Two shock absorbers. (12,000 lb: WB 236")
REAR SUSPENSION	20,000 lb. multi leaves. Two shock absorbers.
STEERING	Hydraulic Ross Gear TRW TAS – 65.
BRAKE SYSTEM	Pneumatic, double independent system – Cam – Drum – Arvin Meritor Q Plus.
ELECTRIC SYSTEM	Two 12V. Batteries. 130 Amperes Alternator. Built – in Regulator.
FUEL	Diesel. 54 gal. diesel tank (204.41 L.).
WHEELS	22.5 X 8.25 in. Disc type.
TIRES	11 R 22.5 Radial type.

## BODYWORK

ACCESS DOORS (FRONT / REAR)	Two folding sheets with pneumatic controls.
DRIVER SEAT	Standard fabric with two – point – seatbelt.
INTERIOR MIRRORS	1 flat and 2 convex on doors.
EXTERIOR MIRRORS	Left flat/convex mixed; right convex.
SEATS	27, 33, 37 plastic ORION.
OTHERS	Tubular galvanized steel structure. Exterior galvanized metal sheet. One – piece FRP roof with two latches. 12 mm navy wooden and linoleum floor. Operator's Rear Screen shield, Sun Shade, bus driver light. Interior finishing: Fiber glass and hot pressed eucalyptus fiber hardboard with melamine coating panels. Front / Rear Door Height: 2090 mm. Front / Rear Door Width: 680 mm. Standing Height: 2000 mm. Lateral Console. Exterior Lights: LED. Interior Lights: Incandescent and courtesy lights on steps. Spare tire. Tool Kit. Towing hooks. Defroster. Exterior Paint: Polyurethane (one color). Radio: AM/FM , CD, MP3 with 2 speakers.

## OPTIONAL ACCESSORIES

Spare tire carrier • Aluminum Rims • Electronic Sign • Tintex windows • One to three emergency exits • Pneumatic driver seat with three – points – seatbelt. • Stainless steel handrail • Two electric windshield wipers • Aluminum skid steps • Wheel chair elevator • Trunk • Rack • Fluorescent inside lights • Heater.

"DINA CAMIONES S.A. DE C.V., FOR THE SAKE OF IMPROVEMENT HAS THE RIGHT TO MODIFY THE SPECIFICATIONS IN ANY MOMENT WITHOUT PREVIOUS NOTICE"